

KM 441 SEAT and MSG85 SUSPENSION


Installation instructions for installation of a KM 8209 seat and an 8077 Mechanical Suspension on a John Deere 7000 series open station tractor

PN : 8209 KM 441



PN :8077 KM MSG85

1. Remove old seat and suspension.
2. Loosen slide rails and slide all the way outward.
3. Attach seat and slide rails to suspension with with four 8mm X 150mm low head socket cap screws.
4. Move seat back and forth a few trimes then tighten from seat to slide rails.
5. Attach PN 6075 to bottom of suspension using four 3/8-16 x 3/4 hex screws and flange nuts. (Run bolts up from plate bottom)
6. Install seat assembly on tractor using four 8mm x 40mm flange bolts. (Place four spacers between PED 7400 and tractor deck.)

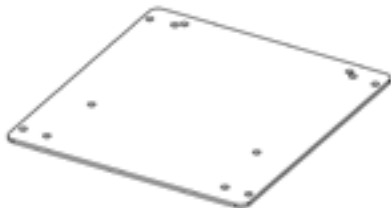

PN 6075 JD PED 7400

HEX SCREWS



FLANGE NUTS



FLANGE BOLTS




SPACERS



LOW HEAD SOCKET CAP SCREWS

PN 6075 JD PED 7400



Use indicated holes to mount assembly to tractor.