

KM 441 SEAT and MSG95 SUSPENSION


Installation instructions for installation of a KM 8209 seat and an 8078 Air Suspension on a John Deere 7000 series open station tractor

PN : 8209 KM 441



PN :8078 KM MSG95

1. Remove old seat and suspension.
2. Loosen slide rails and slide all the way outward.
3. Attach seat and slide rails to suspension with with four 8mm X 150mm low head socket cap screws.
4. Move seat back and forth a few times. Tighten bolts from seat to slide rails.
5. Attach PN 6075 to bottom of suspension using four 3/8-16 x 3/4 hex screws and flange nuts. (Run bolts up from plate bottom)
6. Install seat assembly on tractor using four 8mm x 40mm flange bolts. (Place four spacers between PED 7400 and tractor deck.)

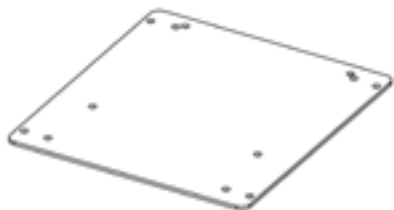

PN 6075 JD PED 7400

HEX SCREWS



FLANGE NUTS




FLANGE BOLTS




SPACERS



LOW HEAD SOCKET CAP SCREWS



PN 6075 JD PED 7400



Use indicated holes to mount assembly to tractor.