



Installation Guide 6904

Installation Instructions for KM 1061 Uni Pro Seat and Suspension in CIH 71, 72 & 89 Magnum & 9200, 9300 FWD with Air Suspension or 71 Magnum with Air/Oil Suspension

KM 1061 Uni Pro
Seat & Suspension
PN: 8528




Optional
Swivel Kit
Available
PN: 5007

1. Remove the original seat and suspension from the tractor by removing four nuts from S brackets located on the floor of the tractor. Remove seat and brackets leaving spacers and studs in place. Unplug the 12 volt wire harness.
2. Bolt the KM 1061 Uni Pro seat and suspension assembly to the PED 6124 using four 5/16" x 3/4" bolts, flat & lock washers, and nuts.
3. Place the seat and pedestal on the four stud bolts and spacers where the original seat was removed. Use the original hardware to fasten down the seat.
4. Locate power cable coming from the lower part of the suspension and connect to the 12volt connection of the tractor. Use the wire harness adapter provided in the kit.

NOTE: The KM 1061 come with Operator Presence Switch. Some tractor models do not have OPS. The OPS harness can be tied up and tucked out of the way.

NOTE: On Hyd. suspensions on 71 Series two hyd. caps are included in install kit to cap lines below cab.

PN: 6124

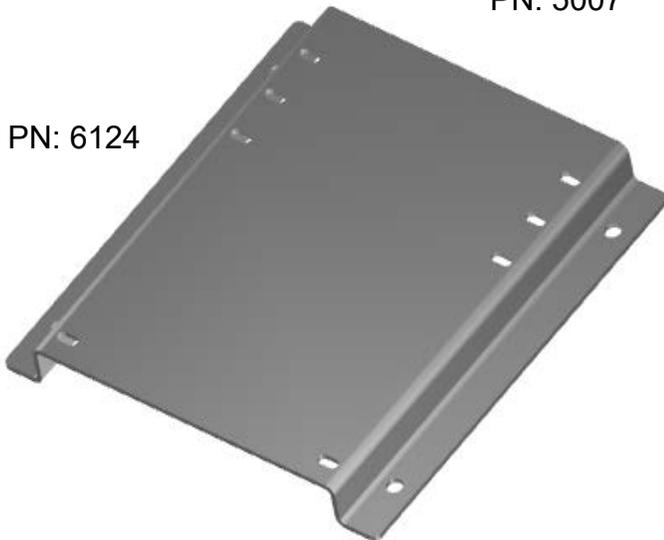

Technical Support

Phone: 1.800.328.1752 / Website: www.tractorseats.com