

JD Buddy Seat

7020-9000T Series



PN: 8249

Fits – John Deere with passenger seat fender or cup holder fender panel 7630, 7720, 7820, 7830, 7920, 7930, 8100T, 8100, 8110T, 8110, 8120T, 8120, 8130, 8200, 8200T, 8210, 8210T, 8220T, 8220, 8230, 8300T, 8300, 8310, 8310T, 8320, 8320T, 8330, 8400, 8400T, 8410T, 8410, 8420, 8420T, 8430, 8520T, 8520, 8530, 9300T, 9320T, 9400T, 9420T, 9430T, 9520T, 9530T, 9620T, 9630T; John Deere Sprayers with passenger seat fender or cup holder fender panel 4720, 4730, 4830, 4930, 4940

INSTALLATION INSTRUCTIONS

Removing Left-Hand Upholstery

Note: Retain all hardware for reuse.

1. Slide seat to most rearward position.
2. Pull floor mat back from left-hand upholstery and remove screws (A).
3. Remove lock pin and disconnect door cylinder (B).



Note: Hold cab door open using rubber straps.

4. Remove door cylinder ball stud and plastic cover.
5. For machines equipped with rear window tray, remove tray screws (C), latch screws (D) and latch (E).
6. For machines equipped with fuse panel cover, open rear window, then remove fuse panel cover (F), screw (G) and cover (H).

IMPORTANT: When removing tray or cover, avoid damaging upholstery by carefully spreading molding around cab post.

7. Remove rear tray.
8. Remove left-hand upholstery panel.


C – Tray Screws
D – Latch Screws
E – Latch
F – Fuse Panel Cover
G – Screw
H – Cover

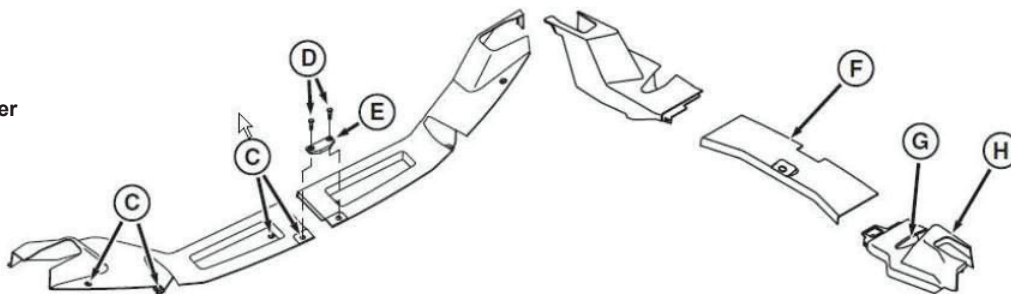

Locating Installation Holes



Note: Before proceeding, place upholstery panel on clean surface.

1. Align seat bracket template on upholstery and trace.
 2. Using a jigsaw, cut along the traced line.
 3. From lower molding, measure back $14 \frac{5}{16}$ " (A). Measure up $12 \frac{3}{4}$ " from cab floor (B).
 4. Using a $1 \frac{1}{8}$ " hole saw, cut lower seat belt latch hole in upholstery.
 5. From the front edge of template area, measure back $6 \frac{5}{16}$ " (C). Measure over $11 \frac{5}{16}$ " (D) from inside edge of template area.
 6. Using a $1 \frac{1}{8}$ " hole saw, cut upper seat belt latch hole.
 7. If tractor **is** equipped with threaded bosses at these locations, seat belt will be attached (step 14) using 12mm x 25mm bolts.
- If tractor **is not** equipped with threaded bosses at these locations, drill holes from outside of fender and seat belt will be attached (step 14) using 12 mm x 55mm bolts.

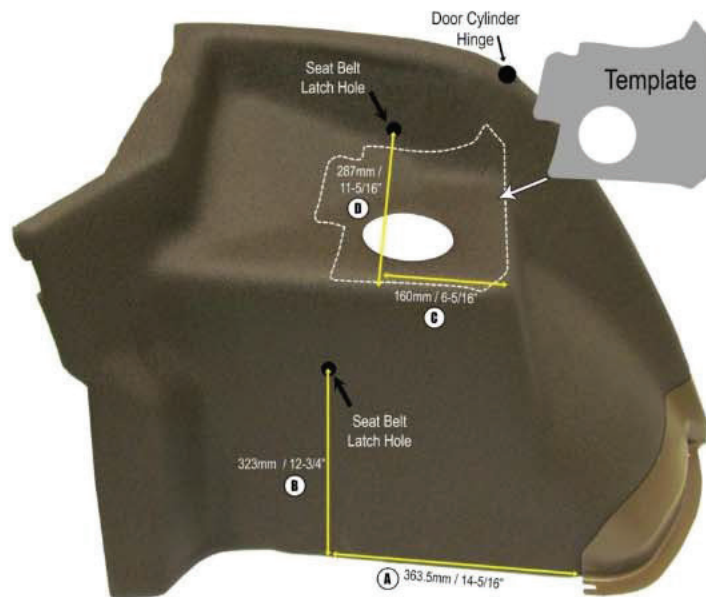


Installing Side Kick Seat

8. Remove forward cushions bolts (A) and loosen rear cushion bolt (B).
9. Remove cushion by sliding forward on seat base.

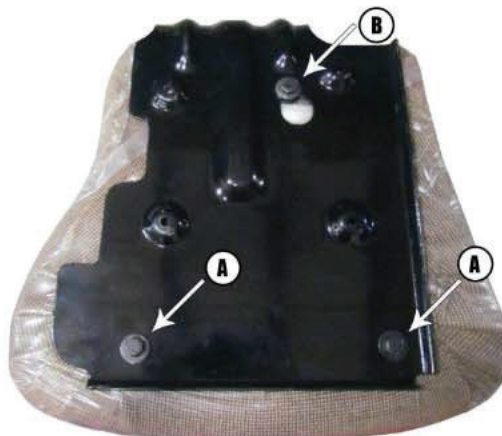

10. Reinstall left-hand upholstery.
11. Reinstall rear cab tray, window latch and tighten hardware.
12. Attach seat bracket to fender bracket using four self-tapping screws (A).
13. Using 12 mm x 25 mm bolts, install seat belt strap to both sides. Push upholstery against fender to align belt. Panel will pull toward fender when tightened.
14. Reinstall door cylinder ball stud and plastic cover (B).

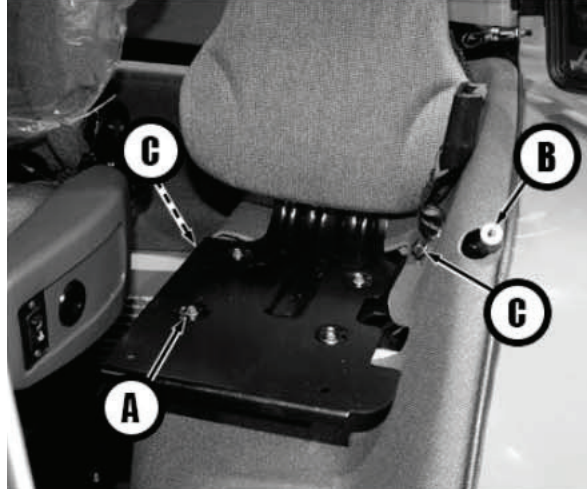

15. Reinstall cushion by placing it on base and pushing rearward until rear bolt (B) slides into slot (C).
16. Reinstall forward seat bolts (A) and tighten.
17. Reinstall door cylinder and retaining clip.
18. Reinstall floor mat.
19. Install left-hand door handle pad.

