



Installation Guide 6593

Installation Instructions to Replace an Air/Oil or Hydraulic Suspension and Seat with a 10004 Uni Pro Seat and Suspension in an IH 86/88 Series Tractor


1004 Uni Pro
Seat &
Suspension
PN: 7892



1. Remove the original seat and suspension mechanisms.
2. Cap the hydraulic lines with the nuts and plugs provided. Hydraulic lines to be capped below the cab. Cut and plug the breather line by turning a 5/16" bolt into the tube.
3. Fasten the 6136 PED to the support bracket with the original bolts and nuts. Use holes so PED is offset to the left.
4. Bolt the seat and suspension assembly to the pedestal with four 5/16" x 1 1/4" bolts, spacers and flange nuts.

Note!

Weight needs to be applied to the suspension to turn mechanical knobs.

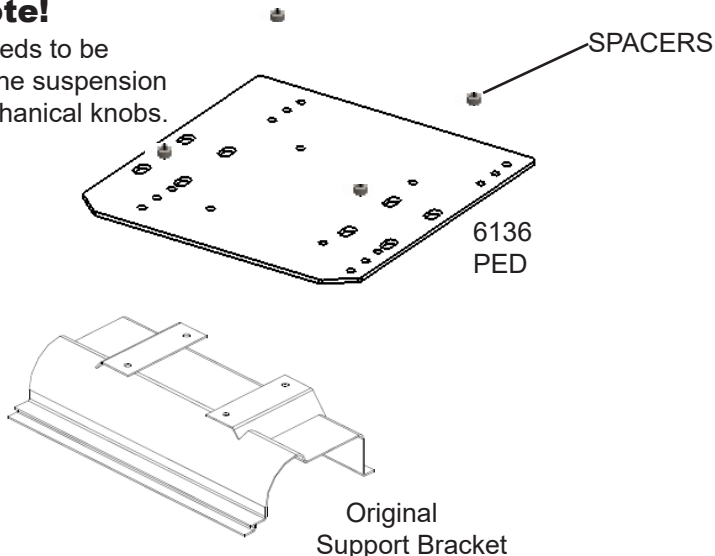

Technical Support

Phone: 1.800.328.1752 / Website: www.tractorseats.com