
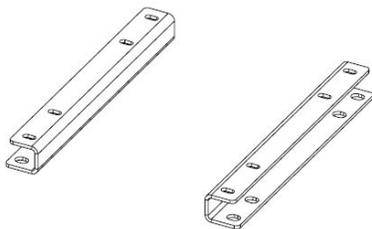


1. Remove the original seat and suspension from the tractor by removing four 1/2" nuts from the base bracket that attach the suspension to the floor of the cab.
2. Bolt the new suspension assembly to the Pedestal 6127 with four 8mm x 20mm bolts, flat washers and flange nuts.
3. Attach the suspension and pedestal to the four stud bolts and spacers where the original seat was removed. Use the original 1/2" nuts from step 1 to fasten down the suspension and pedestal.
4. Bolt the seat and swivel assembly to the suspension assembly using spacers and M8 bolts and nuts provided in the bolt bag. (Mechanical suspensions will not use nuts.)
5. Locate a power source and connect the suspension to power and ground. (Wiring harness provided if needed).

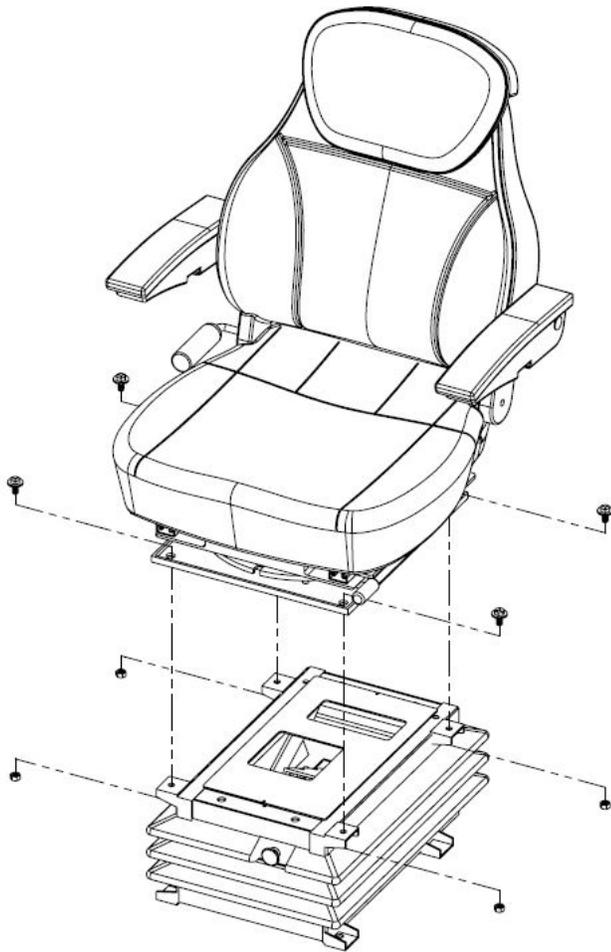

PED 6127