


Installation Instructions for KM 1005 Uni Pro Seat & Suspension in Massey Ferguson Tractors with Flat Floor Platform

1. Remove the original seat and suspension assembly from the tractor.
2. Bolt the suspension assembly to the tractor cab deck with four 5/16" x 1" bolts and flange nuts.
Drilling may be required.
3. Bolt the seat and swivel assembly to the suspension assembly using spacers and M8 bolts and nuts provided in the bolt bag.
(Mechanical suspensions will not use nuts.)
4. Locate power cable coming from lower part of suspension and connect to 12v power source from tractor.

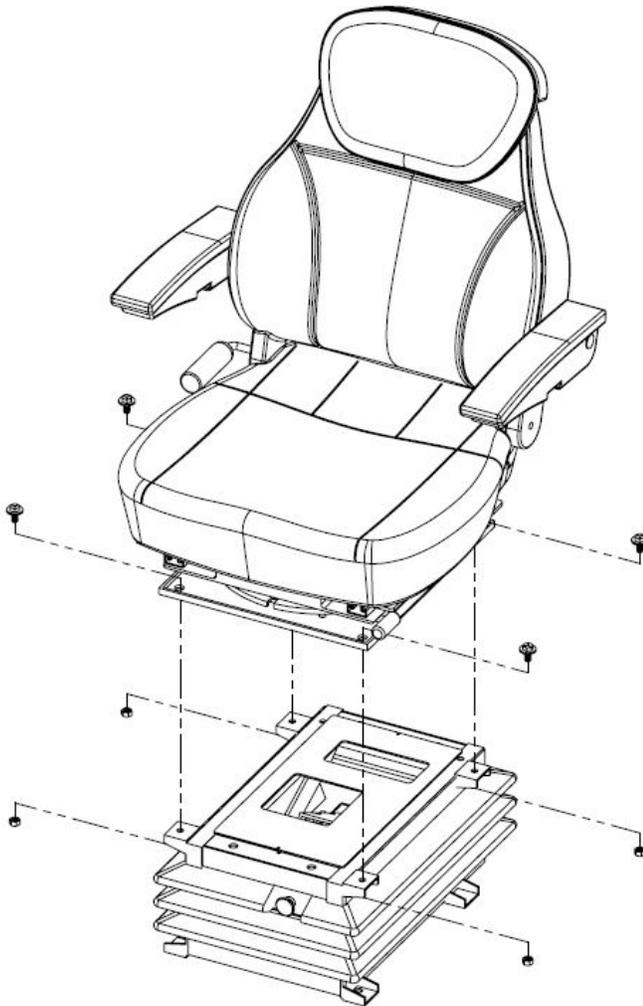

Tractor
Cab Deck